




Indoor/outdoor digital hygro-thermometer for temperature and humidity monitoring

Dual internal and external sensing for reliable monitoring of temperature and relative humidity. Displays dew point, MAX/MIN values, clock and date, and includes programmable high/low alarms plus environmental comfort indication.

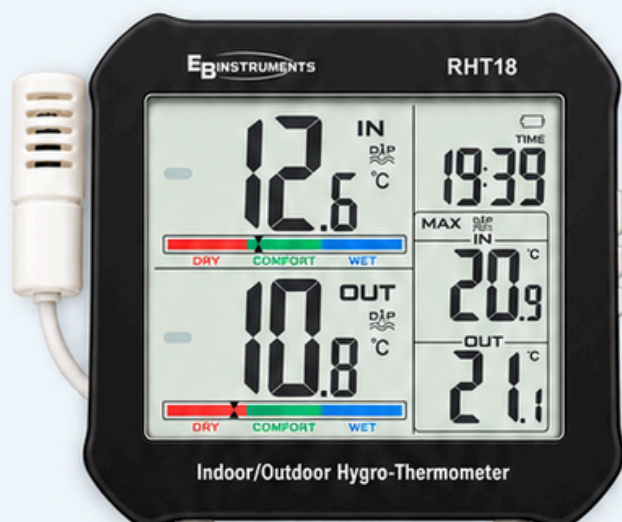

Dual
sensors



-10 to
+60°C



0 to
99%RH



MAX/MIN
+ alarms

KEY FEATURES

- ✓ Built-in sensor + 1 external sensor
- ✓ 1.5 m external probe cable
- ✓ Dew point temperature display
- ✓ MAX/MIN memory and display
- ✓ High/low temp & humidity alarms
- ✓ Comfort indicator, clock and calendar

APPLICATIONS

- Indoor climate monitoring
- Warehouses and storage rooms
- Laboratories and technical rooms
- Offices and HVAC checks
- Home and facility monitoring

TECHNICAL SPECIFICATIONS

Sensor configuration	1 built-in sensor + 1 external sensor
External sensor cable	1.5 m
Temperature range	-10 to +60 °C / +14 to +140 °F
Temperature resolution	0.1 °C / °F
Temperature accuracy	±1 °C / ±1.8 °F
Humidity range	0 to 99 %RH
Humidity resolution	0.1 %RH
Humidity accuracy	±4 %RH
Sampling rate	3 s
Temperature units	°C / °F
Power supply	2 × 1.5 V AA batteries
Battery life	Approx. 7–8 months
Installation	Desktop / wall-mounted